



TP-Link Omada PoE+ Injector Adapter

Brand : TP-Link

Product family: Omada

Product code: POE160S

Product name : PoE+ Injector Adapter

- 2 Gigabit ports ensure faster transmission
 - Complies with IEEE802.3af/at standards, supplies up to 30 W
 - Reduces infrastructure costs by transmitting data and power simultaneously via an Ethernet cable
 - Automatically determines and supplies the exact power to meet the device's need
 - Wall-mounting and desktop design accommodates most installation scenarios
 - Plug & Play installation, requires no configuration
 - Integrated power supply
- PoE+ Injector Adapter



TP-Link Omada PoE+ Injector Adapter:

The PoE+ Injector POE160S (TL-POE160S) fully complies with IEEE 802.3af/at standards, and can work with all IEEE 802.3af/at PoE compliant PDs (Powered Devices) or PoE Receiver Adapters, such as TP-Link's POE10R (TL-POE10R), or other equivalent product, to expand your network to where there are no power line or outlet, where you wish to fix device such as AP, IP Camera or IP Phone, etc.




Network		Operational conditions	
Ethernet interface type	Gigabit Ethernet	Operating temperature (T-T)	0 - 40 °C
Ethernet LAN data rates	10,100,1000 Mbit/s	Operating relative humidity (H-H)	10 - 90%
Cabling technology	10/100/1000	Storage temperature (T-T)	-40 - 70 °C
Power over Ethernet (PoE)	✓	Storage relative humidity (H-H)	5 - 90%
Networking standards	IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u	Weight & dimensions	
Cable types supported	Cat3, Cat4, Cat5, Cat5e	Width	125 mm
Features		Depth	59.4 mm
Product colour	Black	Height	36.8 mm
Wall mountable	✓	Packaging content	
Plug and Play	✓	Number of products included	1 pc(s)
Maximum operating distance	100 m	Wall mounting kit	✓
LED indicators	Power	Power cord included	✓
Ports & interfaces		Quick installation guide	✓
Ethernet LAN (RJ-45) ports *	2	Packaging data	
RJ-45 input ports	1	Package width	170 mm
RJ-45 output ports	1	Package depth	230 mm
Power		Package height	80 mm
Output power	30 W	Package weight	460 g
AC adapter input voltage	100 - 240 V	Package type	Box
AC adapter frequency	50/60 Hz		



8592978537609



1210002617284

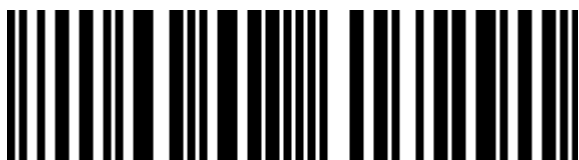

1210002617291



0121002617284



121002617284



0840460605304



840460605304

Catalog Object Cloud



Disclaimer: The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.